





## Gelato Showcase.

Innovative patented glass structure | heated glass sides | sliding glass top on operator side with soft closing system and folding glass opening with magnetic clamps | glass top on customer side with upward opening | front and side LED light fixture | bright aluminum profiles | heated front glass | front air baffle | tank insulated with ecological polyurethane and covered in stainless steel | ventilated refrigeration with increased "delivery port" | reverse cycle defrost | electronic control unit and digital temperature reader flush with the worktop | worktop and perimeter shelf in polished steel | pre-arrangement for pans 5lt dim.  $14 \frac{3}{16} \times 6 \frac{1}{2} \times \frac{3}{4}$  [360 x 165 x 120] or 4lt dim.  $10 \frac{3}{16} \times 6 \frac{5}{16} \times 5 \frac{7}{8}$  [258 x 160 x 150] not supplied | supporting frame in galvanized steel with height adjustable stainless steel feet | technical compartment and open compartment in polished stainless steel



0°F



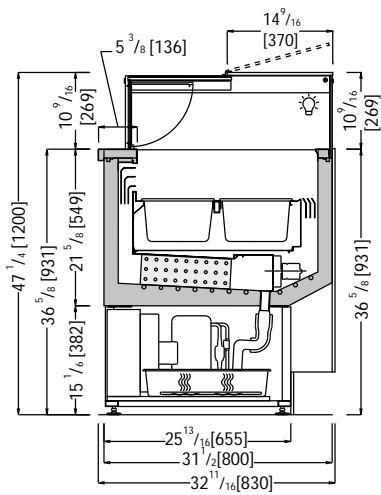

Technical



- Ventilated
- R452A
- Hermetic
- Led no-spot 3000°K
- Automatic / reverse cycle
- N. 4 / RH 55% max 75°F
- 220 V / 3 Ph / 60 Hz
- 0°F

Data Sheet \*Measurements are subject to revisions/updates, please refer to manufacturer's drawings at order confirmation

\*Crate weight only

Model Code	Dimensions L x D x H Inches	Weight Lbs	Max Pwr. Consumption W / A	Avg Operating Consumption KW/h	Cooling Power/Expansion BTU / °F	GAS Type
 F83G1GL12I (+PANELS)	45 1/4 x 32 5/16 x 47 1/4 51 15/16 x 39 3/8 x 58 11/16	397 220	1200 / 6.0	0.7	1365 / -31	R452A
 F83G1GL18I (+PANELS)	64 15/16 x 32 5/16 x 47 1/4 71 5/8 x 39 3/8 x 58 11/16	573 309	1600 / 8.5	0.85	2047 / -31	R452A
 F83G1GL24I (+PANELS)	84 5/8 x 32 5/16 x 47 1/4 91 5/16 x 39 3/8 x 58 11/16	661 396	1890 / 9.5	1.2	2542 / -31	R452A

Optionals:

- CIV60  
 s/s pan mm.  
 258x156x150H
- CIV94  
 s/s pan mm.  
 530x160x100H
- CIVF95  
 s/s display tray
- GSG02  
 Perspex pan
- CIV56  
 s/s dipper well
- SCORTF01-03  
 L-shaped doors
- PASPPA  
 Switch from  
 -0.4°F to +39.2°F
- CIT44  
 Easy Clean Filter
- CIM08  
 Kit wheels