

FLAT P8 GEL R4 H1350

CIAM






Gelato Showcase.

Glass structure with mechanical fastening | heated glass sides | bright aluminum LED light fixture | adjustable intermediate glass shelf on low-voltage bright aluminum electrified rack | PETG easy sliding doors system | anti-fog air bubble | heated front glass | tank insulated with ecological polyurethane and covered in stainless steel | ventilated refrigeration with increased "delivery port" | reverse cycle defrost | electronic control unit and digital temperature reader flush with the worktop | worktop and perimeter shelf in polished steel | prearrangement for pans 5lt dim. 14 3/16 x 6 1/2 x 3/4 [360 x 165 x 120] or 4lt dim. 10 3/16 x 6 5/16 x 5 7/8 [258 x 160 x 150] not supplied | supporting frame in galvani-zed steel with height adjustable stainless steel feet | technical compartment and open compartment in polished stainless steel



0°F



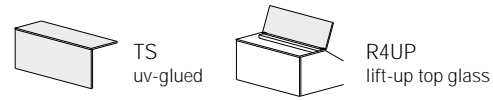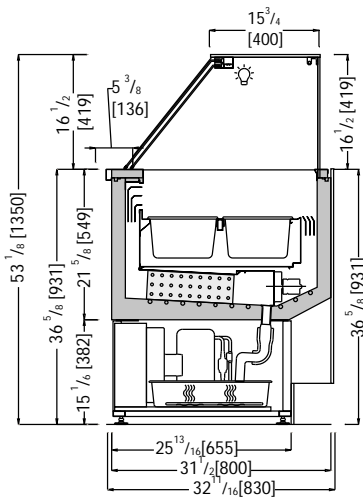

Technical



- Ventilated
- Automatic / reverse cycle
- R452A
- N. 4 / RH 55% max 75 °F
- Hermetic
- 220 V / 3 Ph / 60 Hz
- Led no-spot 3000°K
- 0°F

Data Sheet

*Measurements are subject to revisions/updates, please refer to manufacturer's drawings at order confirmation *Crate weight only

Model Code	Dimensions L x D x H Inches	Weight Lbs	Max Pwr. Consumption W / A	Avg Operating Consumption KW/h	Cooling Power/Expansion BTU / °F	GAS Type
 F83R413GL12I (+PANELS)	45 1/4 x 32 11/16 x 53 1/8 51 15/16 x 39 3/4 x 64 9/16	265 240	1200 / 6.0	0.7	1365 / -31	R452A
 F83R413GL18I (+PANELS)	64 15/16 x 32 11/16 x 53 1/8 71 5/8 x 39 3/4 x 64 9/16	353 331	1600 / 8.5	0.85	2047 / -31	R452A
 F83R413GL24I (+PANELS)	84 5/8 x 32 11/16 x 53 1/8 91 5/16 x 39 3/4 x 64 9/16	419 423	1890 / 9.5	1.2	2542 / -31	R452A
 F83R413GL12+12I (+PANELS)	84 5/8 x 32 11/16 x 53 1/8 91 5/16 x 39 3/4 x 64 9/16	441 423	2040 / 12.0	1.3	1365+1365/ -31	R452A

Optionals:

- CIV60
s/s pan mm.
258x156x150H
- CIV94
s/s pan mm.
530x160x100H
- CIVF95
s/s display tray
- GSG02
Perspex pan
- CIV56
s/s dipper well
- SCORTF01-03
L-shaped doors
- PASPRA
Switch from
-0.4°F to +39.2°F
- CIT44
Easy Clean Filter
- CIM08
Kit wheels